



# Richards-Wilcox

Sectional Overhead Doors

## **STRONG. DURABLE. VIBRANT!** **T200C Thermatite Sectional Insulated Steel Door**

The same great quality and durability you get from every model in the Thermatite Series...



With the added benefit of  
**8 COLOURS**  
to choose from.




ALMOND



BRONZE



BROWN



SLATE GREY



DESERT TAN



SANDSTONE



CAFÉ



BLACK



# THERMATITE colour series



Thermatite Door Systems are built stronger with Neufoam™ technology - a continuous foaming process that renders cavity-free sections. No air pockets inside the panel ensures superior adhesion of our CFC/HCFC-free polyurethane insulation to the steel skin, preventing delamination and providing exceptional structural integrity.

The door has a higher strength-to-weight ratio, offers a better thermal barrier (higher R-Value) and resists deflection. Sections feature thermal breaks to minimize air flow. Installed with our highest quality hardware components, Thermatite Doors are engineered to provide many years of worry-free operation and are suitable for a wide range of applications.

## UNIQUE MULTI-RIBBED (MR) PROFILE

- Multi-Ribbed profile complements contemporary architecture.
- Perfect choice when aesthetics are a key consideration.
- Non-repeating woodgrain surface texture resists scratches and dirt.

## RIBBED PROFILE

- Recognized as a standard look on many door systems that are already installed.
- R- W can provide matching section replacement options to customers quickly and efficiently.



### WeatherLock™ System


Featuring our exclusive WeatherLock™ Section Joint, Dual Fin Triple Contact Weather Seal and Arctic Grade Bulb Shaped Bottom Seal with a Dual Contact aluminum retainer.

### Neufoam™ Technology

In order to achieve the highest thermal values and stability, R-W sections are evenly filled environmentally friendly CFS/HCFC-free Neufoam™.



## PRODUCT SPECIFICATIONS

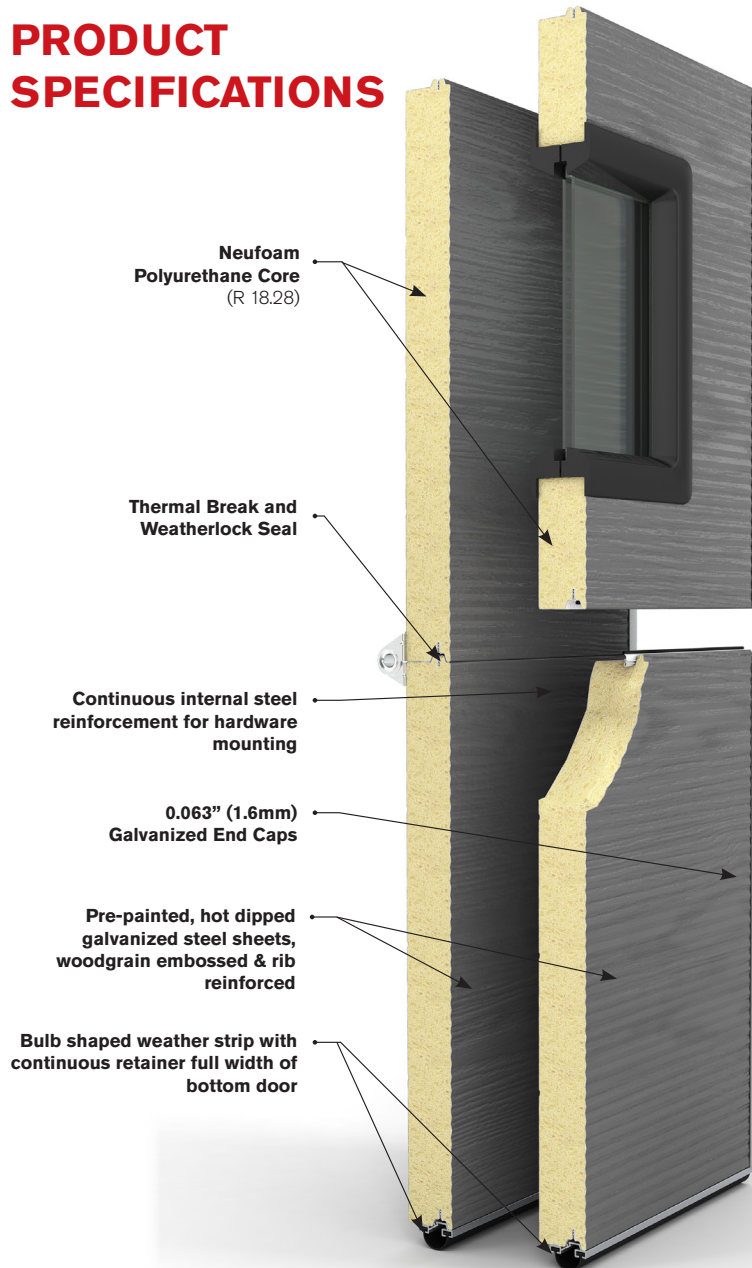

## SECTION SCHEDULE

DOOR OPENING HEIGHT	Sections High	DOOR OPENING WIDTH	Max no. of Windows
7'-1" to 8'-1"	4	8'-0" to 9'-2"	2
8'-2" to 10'-1"	5	9'-3" to 12'-2"	3
10'-2" to 12'-1"	6	12'-3" to 16'-2"	4
12'-2" to 14'-1"	7	16'-3" to 19'-2"	5
14'-2" to 16'-1"	8	19'-3" to 24'-2"	6
16'-2" to 18'-1"	9		

## SECTION DETAILS

**SECTION THICKNESS** 2" (51mm)

### THERMAL VALUE OF SECTIONS

**R** 18.28 ft<sup>2</sup> hF/Btu / **U** 0.311 W/m<sup>2</sup>K


**FACE SHEET PROFILE** Multi-Ribbed / Ribbed

**FACE SHEET THICKNESS** .016" (.41mm)

**MAXIMUM OPENING WIDTH** 24'-2" (7366mm)

**MAXIMUM OPENING HEIGHT** 22' (6706mm)

**FINISH** Two coat, baked-on paint system on exterior side, primer and polyester finish coat.



Almond




Desert Tan




Sandstone



Bronze




Brown



Slate Grey



Café



Black

## GLAZING OPTIONS



Type AA



Type B



Type CPL



Type D



Type E



Fullview

## WARRANTY

**10 years** against delamination of the panels  
**1 year** on materials and workmanship



# Richards-Wilcox

Sectional Overhead Doors

**For additional information and friendly advice,  
please contact your local Richards-Wilcox dealer**

Professionally installed and serviced by:

**RICHARDS-WILCOX GARAGE DOORS**

**Engineered for Life**

5100 Timberlea Boulevard, Mississauga, Ontario Canada L4W 2S5

Toll Free: 1 (800) 667-1572 | Tel: (905) 625-0037

Fax: (905) 625-0057 | Email: [info@rwdoors.com](mailto:info@rwdoors.com)

**[www.rwdoors.com](http://www.rwdoors.com)**