

Specifications

Administrative USB

Connect Mini-USB cable to access administrative functions

Power Configuration

Jumper selects between PoE or wired power supply

Door 1

- Auxiliary Relay 1
- Aux Relay 1 LED
- Primary Relay 1
- Relay 1 LED

External


12V Power

Door 2

- Auxiliary Relay 2
- Aux Relay 2 LED
- Primary Relay 2
- Relay 2 LED

Backup Lithium Battery

Preserves the system's data during primary power outages

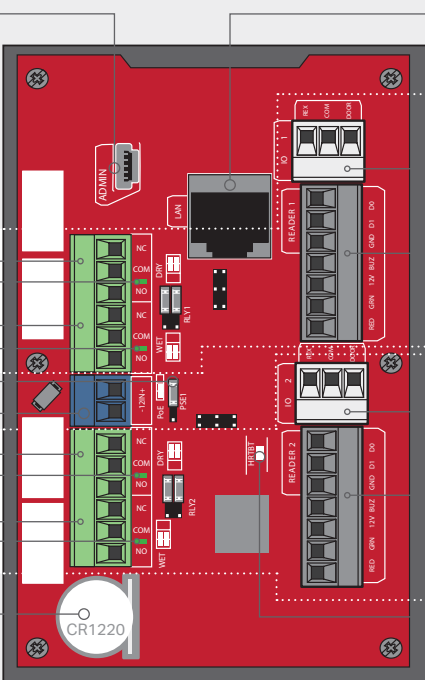

LAN/PoE Connector

Connect to network/ may also carry 802.3af/at power

Request to Exit Status 1

Wiegand Input 1

Request to Exit Status 2

Wiegand Input 2

Local Heartbeat LED

LED indicates proper function

Capacities

- 2 controlled gates/doors
- 25,000 local resident capacity
- 6,000 local event history (FIFO) offline from host
- Multiple, holiday and hold-open scheduling
- Compatible Wiegand Input formats: 26 Bit, 30 Bit, 37 Bit (HID) and 32 Bit (MiFare)
- No facility code limitations (1–256 for 26-Bit); feature available to ignore facility code

Mechanics

- Compact size mounts on standard single electrical-gang box or in a NEMA enclosure
- LED indicator lights communicate status

Operating Temperatures

- 31°F to 150°F (-35°C to 66°C)

Communication Internet (Dynamic or Static IP)

- DSL with at least 1 MB download speed
- Cellular (optional CAPCELL)

Power

- 12VDC, min. 1.5 amps (transformer not included)
- PoE (802.3af) enabled network devices, 13 watts max.
- UL 294® Listed
- Backup lithium battery preserves the system's data during primary power outages

2 Year Warranty

1 Carton Shipping Details

Dimensions: 7.5"W x 5.0"H x 3.0"D
Contents: 1 CAP2D, miscellaneous hardware
Weight: 1.0 lb.

CAP2D

Connected Access Portal, 2-Door Controller



PRODUCT GUIDE

Business partners

For Sales | 800.282.6225
For Technical Support | 800.528.2806
For Billing | 877.247.6764
To Learn More | myQ.com/Community
For Training | Support.Partner.LiftMaster.com/s/Community-Access-Support

CAP2D

Connected Access Portal, 2-Door Controller

A behind the scenes powerhouse, the CAP2D provides a scalable cloud-based solution to easily manage and control access independently or as part of a complete system for resident only and community amenity access points.

Popular features

Multiple-Entrance Control

With myQ® Community Control.

Eliminates Wiring

Between controllers in multiple-entrance applications with myQ Community Control.

Universal Compatibility

With 26-, 30- and 37-bit Wiegand-compatible readers, receivers and readers.

Expansive Capacity

For 25,000 active credentials stored locally so residents can enter even when the Internet is down.

Remote Programming

And activity monitoring using myQ Community Control.



Easy to Install

In new or existing properties.

Backed-up Storage

myQ Community Control ensures that databases are never lost and a backup lithium battery preserves the system's data during primary power outages.

Power over Ethernet (PoE)

Allows for flexibility of device placement.

Email Alerts

Over 75 alerts available including door ajar, door closed, door forced open, gate ajar and too many invalid PINs.

Real-time Activity Tracking



With myQ Community Control.

Cloud-based Security

Keeps data protected and safeguards resident information.

Managing credentialed access

myQ® Community Control lets you conveniently manage and control multiple access points across all communities in your portfolio from a single dashboard. With 24/7 ability to easily add/delete residents, assign access to specific entrances and receive real-time activity alerts you can maximize efficiency and improve operations.

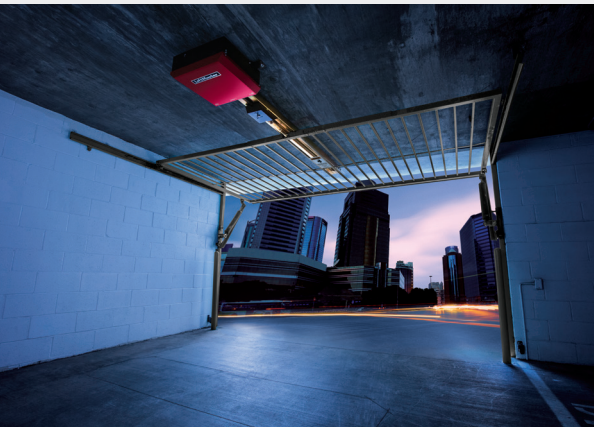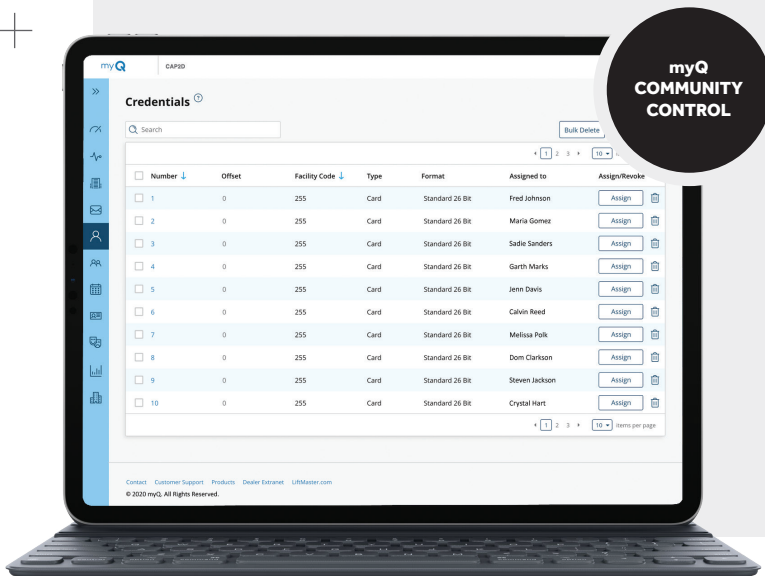

Control for gates


Monitor and control any gated access point through the myQ Community Control web application or with personalized vehicle tags and keypad credentials.



Control for doors

Enable secure, credentialed access to nearly any walk-through door in any residential or commercial application with proximity card readers or keypad credentials.

Product Ecosystem

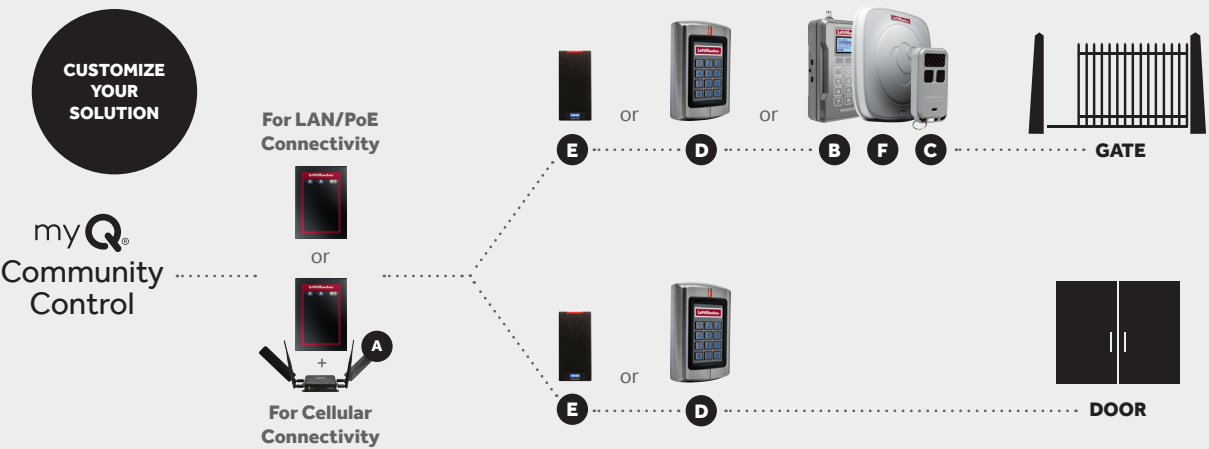

A CAPCELL
Cellular 4G/LTE Wi-Fi® Modem
Connects CAP2D.

B PPWR
Passport Credentialed Receiver
Security+ 2.0® receiver compatible with all standard Wiegand protocols.

C PPV3M / PPK3PHM / PPLK1-X
Passport Visor and Keychain Remote Controls with Credentialed IDs
Offers residents a single solution to access gates, garages and other community entry points.*

D KPR2000
Wired Keypad and Proximity Reader
Single-entry multi-function access controller with integrated keypad and card reader.

E LMMC-MINI / LMPC2-ST
Mini-Proximity Reader and Proximity Card
For credentialed access.

F LMSC1000 / LMUNTG / LMHNTG
RFID Long-Range Reader and Vehicle Tags
Reads RFID vehicle tags 20' - 30' away reducing vehicle congestion.

*3-button Passport MAX Remote Controls compatible with the PPWR Receiver for gate access control and LiftMaster Security+ 2.0® (Tri-band 310/315/390 MHz) and backwards compatible to Security+® (315/390 MHz) residential garage openers. 1-Button Passport Lite Remotes not compatible with LiftMaster residential garage door openers.