

LA400PKGUL SWING GATE OPERATOR

SECTION 32 31 00



KEY FEATURES

| | |
|---|---|
| BATTERY BACKUP | Up to 97 days of standby power or 400 cycles when the power is down |
| REMOTE CONTROL ACCESS | Security+ 2.0® 3-channel receiver will handle up to 50 remote controls (unlimited remotes with 811LM/813LM) |
| INTERNET CONNECTIVITY | MyQ® technology monitors and controls the operator through the MyQ app |
| MONITORED SAFETY INPUTS | 3 inputs main board; 3 optional expansion board |
| SOLAR-POWER CAPABILITIES | Yes. Reference detailed solar chart on product page at LiftMaster.com |
| DIAGNOSTIC DISPLAY | LED diagnostic display |
| WIRELESS DUAL-GATE COMMUNICATION | Eliminates expensive conduit costs and unsightly driveway scars |
| FIRE DEPARTMENT COMPLIANT | Allows gate to auto open upon loss of AC power or battery depletion |
| LIMIT SETTING | Electronic |
| DUAL-GATE CONTROL | Bi-part delay or synchronized close |
| PROGRAMMABLE AUXILIARY RELAYS | With optional expansion board - easily add additional features, such as warning lights/alarms |
| UNAUTHORIZED ACCESS PREVENTION | With optional expansion board - operator can be programmed with anti-tailgate or quick close capabilities |
| HOMELINK® COMPATIBLE | Version 4 and higher |

SPECIFICATIONS

| | |
|-----------------------------------|--|
| OPERATOR SPEED | 90-degree opening in 17 seconds |
| POWER | 120/230VAC single phase |
| ACCESSORY POWER | 24VDC 500mA output; switched and unswitched power |
| OPERATOR WEIGHT | Actuator arm 19 lbs.; standard control box 13 lbs.; includes (2) 7Ah batteries |
| WARRANTY | 2 years |
| TEMPERATURE SPECIFICATIONS | -4°F (-20°C) to 140°F (60°C) |
| UL USAGE CLASSIFICATION | UL 325 & UL 991 listed – class I, II, III and IV |

CONSTRUCTION

| | |
|-------------------------------|---|
| MOTOR | 24VDC motor with soft start/stop |
| OPERATOR DUTY RATING | 100 cycles per day |
| GEAR REDUCTION | Precision machined all-metal gear drive |
| RECOMMENDED CAPACITIES | Rated for gates up to 16 ft. in length or weighing up to 850 lbs. |


DATA SHEET
SWING GATE OPERATOR

LiftMaster

LA400PKGUL SWING GATE OPERATOR

SECTION 32 31 00

DIMENSIONS

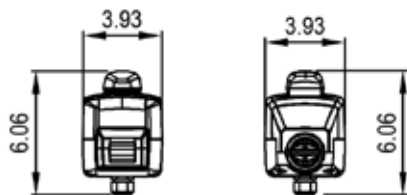


LEFT*

RIGHT**


*Attached to gate post.

**Attached to gate.


ACTUATING ARM

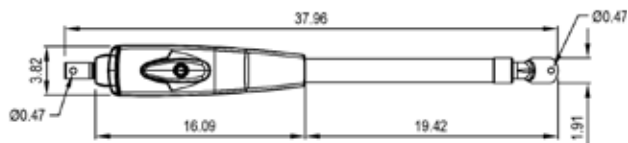

TOP

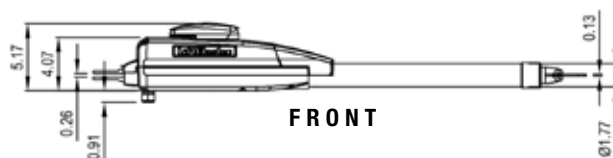


FRONT

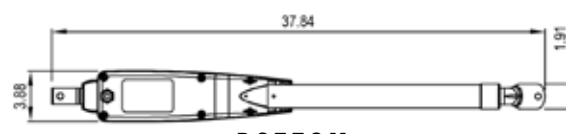


BOTTOM


CONTROL BOX




LEFT




FRONT




RIGHT



BACK



TOP



BOTTOM

CAPACITY

BATTERY BACKUP OPERATION

| BATTERY | CYCLES | STANDBY TIME |
|-----------|--------|--------------|
| (2) 7Ah | 400 | 97 Days |
| *(2) 33Ah | 3622 | 180 Days |

*Requires XLSOLARCONTROL Control Box and LA400DC Arm.

