

MINIKEY ACCESS CONTROL SYSTEM MK500GS

SECTION 28 13 00



KEY FEATURES

UNIT INTERFACE CAPABILITIES	PIN
STAND ALONE	Yes

SPECIFICATIONS

POWER SUPPLY	120VAC to 16VDC transformer (included in carton)
PROGRAMMING (DATABASE MANAGEMENT)	Keypad
LOCAL USER CAPACITY	500
MAX NUMBER OF GATES/DOORS OF CONTROL (EACH)	1
RELAY OUTPUT	1
MOUNTING OPTIONS	Surface/gooseneck
CAMERA READY	No
ANTI-TAMPER ALARM	No
WARRANTY	1 year

CONSTRUCTION

ENCLOSURE MATERIAL	Stainless steel
--------------------	-----------------




MINIKEY ACCESS CONTROL SYSTEM

MK500GS

SECTION 28 13 00

DIMENSIONS

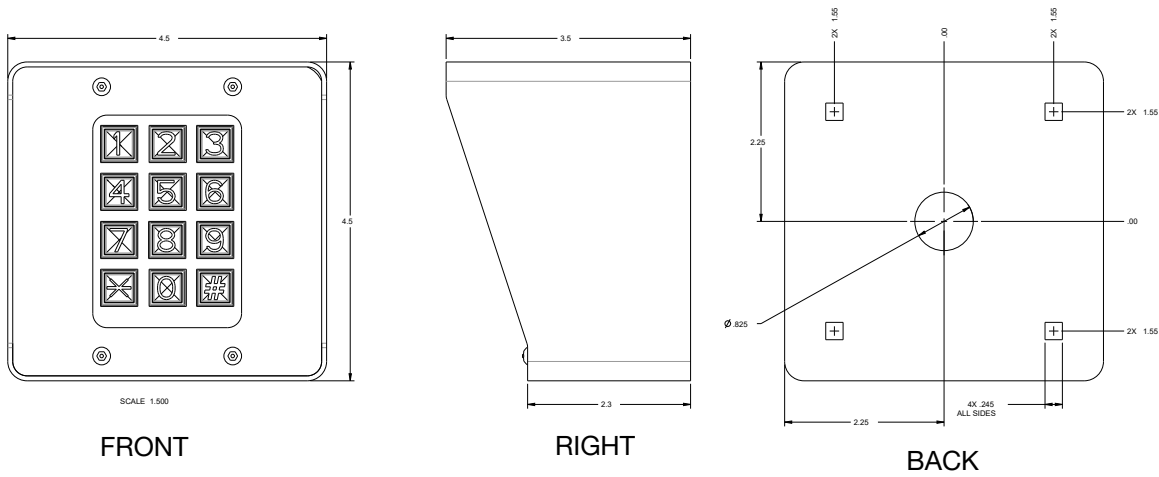

RANGE

MiniKey Feature	Wired	Wire type	Range
Power 120VAC to 16VDC transformer (from outlet to controller)	x	2 wire (14 AWG) 2 wire (16 AWG) 2 wire (18 AWG)	Up to 300 ft. Up to 200 ft. Up to 100 ft.
Relay ouput wiring	x	2 wire (18-24 AWG)	Up to 2500 ft.